



01/28/00

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	Attorney Docket No.	0039-7544-2TTCRD
	First Inventor or Application Identifier	Koji YAMAMOTO, et al.
	Title	AN OBJECT DETECTION METHOD AND A VIDEO RETRIEVAL METHOD

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17) (Submit an original and a duplicate for fee processing)	ACCOMPANYING APPLICATION PARTS 6. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 7. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee) 8. <input type="checkbox"/> English Translation Document (if applicable) 9. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations (1) 10. <input type="checkbox"/> Preliminary Amendment 11. <input checked="" type="checkbox"/> White Advance Serial No. Postcard 12. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application. Status still proper and desired. 13. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) (1) (if foreign priority is claimed) 14. <input checked="" type="checkbox"/> Other: Notice of Priority, Statement of Relevancy
2. <input checked="" type="checkbox"/> Specification Total Pages 35	
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) Total Sheets 14	
4. <input checked="" type="checkbox"/> Oath or Declaration Total Pages 4 a. <input checked="" type="checkbox"/> Newly executed (original) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d)) (for continuation/divisional with box 15 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §1.63(d)(2) and 1.33(b).	
5. <input type="checkbox"/> Incorporation By Reference (usable if box 4B is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4B, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	

15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application no.:
 Prior application information: Examiner: Group Art Unit:

16. Amend the specification by inserting before the first line the sentence:

☐ This application is a ☐ Continuation ☐ Division ☐ Continuation-in-part (CIP)
 of application Serial No. Filed on

☐ This application claims priority of provisional application Serial No. Filed

17. CORRESPONDENCE ADDRESS

OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C.
 FOURTH FLOOR
 1755 JEFFERSON DAVIS HIGHWAY
 ARLINGTON, VIRGINIA 22202
 (703) 413-3000
 FACSIMILE: (703) 413-2220

Name:	Marvin J. Spivak	Registration No.:	24,913
Signature:		Date:	1/28/00
Name:	C. Irvin McClelland	Registration No.:	

Registration Number 21,124

01/28/00
 09/193013
 U.S. PTO

TITLE OF THE INVENTION

AN OBJECT DETECTION METHOD AND A VIDEO DATA RETRIEVAL
METHOD

FIELD OF THE INVENTION

The present invention relates to an object detection method and a video data retrieval method to retrieve a predetermined object or a frame including the predetermined object from a plurality of frames by referring to a descriptor of the frame.

BACKGROUND OF THE INVENTION

Recently, by multi-channel broadcast in proportion to digital satellite broadcast and cable television, video data obtained by a user greatly increase. On the other hand, because of progress in computer techniques and a realization of large capacity recording medium such as DVD, video data may now be stored as digital information and easily processed by the computer.

In order for the user to actually utilize the video data, an effective retrieval technique is necessary to retrieve the user's desired video from the large number of video data. As such kind of retrieval technique, some

information is attached to each object in video data and the video data including the object matched with the user's necessary information is retrieved to supply audio-visual data to the user. In order to attach the information to the object in video data, processing to extract the object from the video is necessary. However, while the video data greatly increases, the user's manual operation to extract the object is not effective.

As for automatic detection technique of the object, a method to extract the object from video whose background area does not move is well known. However, in this method, it is assumed that the background area stands still. In case of moving the background area in proportion to moving the camera, it is difficult to detect the object from the video.

In short, if an outward form of the object is previously known but the background movement is not previously known, in case of retrieving the object by using the movement of the object, the retrieval is not correctly executed by effect of camera-work. For example, when an object moving to the left side is followed by the camera, the object almost stands still in a frame and the background moves to the right side in the frame. Therefore, the frame including the object moving to the left side is not retrieved from the video data.

As mentioned-above, in the prior art, the object is

not correctly detected from the frame including the background relatively moving. Furthermore, the frame including such kind of object is not retrieved.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an object detection method to detect an object from video data including a background relatively moving.

It is another object of the present invention to provide a video data retrieval method to retrieve the frame including the object from a plurality of frames including the background relatively moving.

According to the present invention, there is provided an object detection method, comprising the steps of: extracting a moving vector of each block from input video data including a background area and at least one object area; estimating a movement of the background area in the video data by referring to the moving vector; eliminating the estimated move of the background area from the video data; and detecting the object area by referring the moving vector in the video data from which the move of the background area is eliminated.

Further in accordance with the present invention, there is also provided a video data description method, comprising steps of: extracting feature data of predetermined object and feature data of background area from a frame of the input video; describing the feature data of predetermined object and the feature data of background area respectively as a descriptor of the frame.

Further in accordance with the present invention, there is also provided a video data retrieval method, comprising steps of: describing feature data of predetermined object and feature data of background area for each frame in a plurality of frames; inputting feature data of retrieval object; calculating a difference between the feature data of background area and the feature data of predetermined object; comparing the difference with the feature data of retrieval object; and retrieving the predetermined object or the frame including the predetermined object matched with the retrieval object from the plurality of frames according to the comparison result.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a flow chart of processing of a video retrieval system according to a first embodiment of the present invention.

Fig. 2 is a flow chart of processing of object detection according to the first embodiment in Fig. 1.

Fig. 3 is a schematic diagram showing the relation between I picture and P picture in MPEG stream.

Fig. 4 is a schematic diagram showing elimination of low reliability vector on P picture.

Fig. 5 is a schematic diagram showing an error between the moving vector and a vector of Affine conversion model on macro block.

Fig. 6 is a flow chart of calculation of conversion coefficient of the background according to one method.

Fig. 7 is a schematic diagram showing the object and the background as unified blocks on the frame.

Fig. 8 is a flow chart of calculation of conversion coefficient of the background according to another method.

Figs. 9A, 9B, and 9C are schematic diagrams showing correspondence of same object among three frames.

Figs. 10A, 10B, and 10C are schematic diagrams showing feature data of the object and the background as descriptor.

Fig. 11 is a flow chart of processing of retrieving

object in the first embodiment.

Fig. 12 is a schematic diagram showing elimination of the camera work from the video in the object retrieval processing.

Fig. 13 is a schematic diagram showing retrieval of the frame using the camera-work matched with an input camera-work in the object retrieval processing.

Fig. 14 is a flow chart of processing of the video retrieval system according to a second embodiment of the present invention.

Fig. 15 is a flow chart of processing of the video retrieval system according to a third embodiment of the present invention.

Fig. 16 is a schematic diagram showing correspondence of same object between two successive frames in the third embodiment.

Fig. 17 is a schematic diagram of sampling processing of moving data input from outside in the third embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In the first embodiment of the present invention, three functions are supplied to the user. First, in addition to a function of playing the video data, the moving object is automatically detected from the video data and the object is synthetically displayed by overlapping with a figure such as an ellipse or a rectangle in order to inform the existence of the object to the user. Second, the feature data of the detected object and the feature data of the background are separately described in an external file as the descriptor. The feature data of the detected object includes a position, an outward form, and movement information of the object. Third, feature data of retrieval object is input from outside by the user. This input feature data is compared with the feature data of the object in the descriptor, and the object matched with the input feature data is retrieved from the video data in order to present to the user.

Fig. 1 is a flow chart of processing of the video retrieval system according to the first embodiment of the present invention. In Fig. 1, first, original video data 100 regenerated from a recording medium such DVD is input (step 101). A predetermined object is detected from the input video data 101 by a method explained afterward (step 102). In this case, the background information is

additionally detected from the video data. The detected object is synthetically displayed by overlapping with an ellipse or a rectangle as the object detection result data 104 (step 103).

On the other hand, generation processing of the feature data of the detected object and the feature data of the background is executed (step 105). In this case, the position, the outward form, and the moving information of the object are detected at step 102. Then, the feature data 107 of the object and the background are described as the descriptor data (step 106). At steps 105 and 106, a difference of the feature data between the object and the background may be described in the descriptor.

Furthermore, the difference data with the feature data of the object or the difference data with the feature data of the background may be described in the descriptor. As the description processing of step 106, concretely speaking, the feature data 107 is stored in various kinds of memory device or displayed. The recording medium to store the feature data 107 may be DVD to store the original video data 100 or may be another recording medium.

Next, in order to retrieve the object, a decision processing of similarity degree between the feature data of the object generated at step 105 and the feature data 110 of retrieval object input at step 109 is executed (step 108). Then, a synthesis display processing to display the

decision result of the similarity degree as the retrieval result data 112 is executed (step 111). In this case, the feature data of retrieval object 110 includes at least the position, the outward form (size) and the moving information of the retrieval object.

Next, Fig. 2 is a flow chart of processing of object detection at step 102 in Fig. 1. First, a moving vector is extracted from the original video data (step 201). In case the original video data 100 is MPEG data, the moving vector obtained from P picture is used. In this case, the moving vector is obtained for each macro block in P picture. In case the original video data 100 is analog data or digital data without the moving vector, the original video data 100 is digitized if necessary. The moving vectors are extracted using optical flow from the digitized video data.

Otherwise, the moving vector is extracted after the digitized video data is converted to MPEG data.

In this extracted moving vector, actual movement of the object is often not reflected. Especially, circumference part of the frame and flat part of texture do not include the actual object movement. Therefore, the moving vector of low reliability is eliminated (step 202). First, as for the circumference part of the frame, a predetermined circumference area is set on the frame and the moving vector in the predetermined circumference area is eliminated. Second, as for the flat part of texture, in

case the original video data 100 is MPEG data, DC component of DCT coefficient (discrete cosine transformation) of I picture is used as shown in Fig. 3. I picture and P picture are respectively consisted of predetermined number of macro blocks. Fig. 4 shows P picture overlapped on I picture. In each macro block of P picture, an end point of the moving vector is positioned at the center point of the macro block. A start point of the moving vector is positioned at an arbitrary point of each macro block of I picture. In each macro block of I picture, distribution of four DC components is calculated. If the distribution is below a threshold, the macro block is decided as a low reliability block as shown in oblique line area of Fig. 4. Therefore, the moving vector whose start point is positioned in the low reliability block of I picture is eliminated from P picture. In the moving vector remained in P picture, object movement includes background movement such as camera-work. In order to correctly detect the object movement, the background movement must be eliminated. Therefore, in the first embodiment, affine transformation model is used as a transformation model to approximate the background movement such as the camera-work. A transformation coefficient of the affine transformation model is estimated using the moving vector. As a result, the background movement is estimated (step 203). As estimation processing of Affine transformation

coefficient, various kinds of methods are selectively used as explained afterward.

Next, the start point of each moving vector is moved as an ideal moving vector by estimated affine transformation coefficient. The ideal moving vector is subtracted from the original moving vector to eliminate the background movement (step 204). As for the moving vector from which the background movement is eliminated, the P picture is divided into areas each including similar moving vector (step 205). In short, a plurality of macro blocks whose moving vectors are almost equal are unified as one area. Concretely speaking, a direction and a size of the moving vector of one block is compared with a direction and a size of the moving vector of neighboring block on P picture. If a difference of the direction and a difference of the size are respectively below a threshold, the one block and the neighboring block are unified as one area. This processing is repeated for each combination of two neighboring moving vectors on P picture. In each area obtained at step 205, a particular area not suitable as the object is excluded by a threshold processing (step 206), and the object data 207 are finally outputted.

Hereinafter, as estimation processing of affine transformation coefficient at step 203, the following three methods are explained.

(method 1)

In method 1, the affine transformation coefficient is estimated by the moving vectors on P picture from which the low reliability moving vectors are eliminated. As shown in Fig. 5, assume that a center point of i-th macro block is y_i , the moving vector whose end point is positioned in the i-th macro block is v_i , a start point of the moving vector is $x_i (= y_i - v_i)$, and the affine transformation coefficient is α . In this case, the start point x_i is moved by the affine transformation model as the end point " $r_i = x_i \alpha$ ". An error between the transformed end point r_i and actual end point y_i is estimated as " $e_i = r_i - y_i$ ". A total sum of estimated error of each moving vector is represented by the following equation. The affine transformation coefficient α is calculated so that the total sum is minimized.

$$\sum_i \Psi (e_i / \sigma_i) = \min \quad \dots\dots (1)$$

A method of least squares is used in order to solve this problem. In this case, " $\Psi (z) = z^2$ " is used in the equation (1). However, in the method of least squares, the moving vector of background and the moving vector of object are equally treated. As a result, affine transformation coefficient is not estimated from the moving vector of background, and the affine transformation coefficient includes the moving of object. Therefore, assume that background area is above 50 % of the frame and the moving

vector of object is regarded as disturbance. The affine transformation coefficient can be estimated from the moving vector of the background area. As a method strong in the disturbance, a robust estimation method is used. In this case, especially, M estimation of Biweight method is used as one robust estimation method. In the Biweight method, effect of the disturbance is reduced by decreasing the weight of element including a large error. Concretely speaking, in $\Psi(z)$ of equation (1), following equation (2) including weight "w" is used. Constant "c" is selectively set as "5 ~ 9".

$$\Psi(z) = \int w_j z dz \quad \dots\dots (2)$$

$$w_j = \begin{cases} (1 - (z_j/c)^2)^2 & |z_j| < c \\ 0 & \text{otherwise} \end{cases} \quad \dots\dots (3)$$

In this way, the affine transformation coefficient of the background area is calculated. As for otherwise condition " $|z_j| \geq c$ " in equation (3), the macro blocks whose moving vectors satisfy this otherwise condition are extracted from the background area on P picture. These macro blocks are regarded as the object area. Therefore, the affine transformation coefficient of the object area is calculated from the moving vectors included in these macro blocks in the same way as mentioned-above.

(method 2)

Fig. 6 is a flow chart of estimation processing of affine transformation coefficient according to method 2. First, as for the moving vector 500 after eliminating the low reliability vector, the P picture is divided into areas each of which includes similar moving vectors (step 501). In this case, elimination processing of moving of background is not executed. Next, by using the moving vectors included in each divided area, the affine transformation coefficient is estimated to approximate the moving of each area as an affine transformation model (step 502). In this case, robust estimation method is used in the same way as method 1. Next, clustering processing of each divided area is executed (step 503). In this case, a table stores each combination of two areas, and a distance between two areas is calculated by affine transformation coefficient. For example, Euclid distance of six coefficients of affine transformation model is used, but other kinds of distance may also be used. Next, two areas of which distance is minimum are unified, and an affine transformation coefficient is newly calculated from the unified area. These two areas are deleted from the table and the unified area is newly stored in the table as an update. This processing is repeated until a distance between two unified areas is above a threshold or only one unified area finally exists in P picture. For example, as

shown in Fig. 7, the macro blocks on P picture are clustered as three unified areas. Then, a largest unified area is decided as the background area (step 504), and the affine transformation coefficient is calculated from the largest unified area. The affine transformation coefficient 505 is outputted as the transformation coefficient of the moving of the background area. In Fig. 7, the largest unified area is decided as the background area and other two unified areas are decided as two object areas.

(method 3)

Fig. 8 is a flow chart of estimation processing of affine transformation coefficient according to method 3. First, as for a plurality of frames, each frame is divided into areas each of which includes similar moving vectors in the same way as in method 2 (step 601). Next, the transformation coefficient is estimated to approximate the moving of each area by affine transformation model (step 602). Furthermore, by using a position, the moving vector, and the transformation coefficient of each area, corresponding areas among the plurality of frames are determined (step 603). Then, in the same way as in method 2, the areas in each frame are clustered (step 604). If classification of one area of one frame is different from classification of corresponding area of other frames, the

classification of the one area of the one frame is corrected to coincide with the classification of the corresponding area of the other frames (step 605). In short, as for each corresponding area in the plurality of frames, the classification to which a largest number of corresponding areas belong is decided as the correct clustering result. For example, as shown in Figs. 9A, 9B, and 9C, assume that oblique line part of left upper position on two frames (i) and (i+2) are clustered as object B and two oblique line parts of left upper position on frame (i+1) is respectively clustered as object C and object D. However, by the left upper position among three frames (i)(i+1)(i+2), two objects C and D corresponds to object B. Therefore, two oblique line parts (objects C, D) on frame (i+1) is corrected as the object B. Last, a largest clustered area in each frame is decided as the background area (step 606), and the transformation coefficient 607 of the background area is calculated from the largest clustered area. In this method 3, even if the background area is temporarily smaller than another clustered area in one frame, the background area is correctly decided. In the above example, the affine transformation is used as the transformation model to estimate the background movement. However, other transformation models such as transparent transformation may be used.

Next, by referring to Figs. 10A-C, feature data representation in descriptor for the object and the background at step 106 in Fig. 1 is explained. For example, in Fig. 10A, the descriptor 700 of three objects in video 705 of 1000-th frame is shown. This descriptor 700 includes a frame number 701 corresponding to the frame in video stream 706, the feature data 703 of object and the feature data 704 of the background. The descriptor 700 is linked to next descriptor by list structure using a pointer 702. The feature data 703 of object includes at least a position, an outward form (size) and a moving information of the object. Concretely, as shown in Fig. 10B, the feature data 703 of the objects includes various kinds of information. In this example, the position, the outward form, affine transformation coefficient, an average and a direction of the moving vector, and a color histogram are included. In this case, the outward form of the object may be approximated by simple figure such as an ellipse or a rectangle. The affine transformation coefficient is estimated in case the movement of the object is approximated by affine transformation model. The average of the moving vector is an average of scale of the moving vector in the object. In case the color information of the object is obtained, the color histogram of the object area is used as the feature data. As for the object movement, either the moving information from which the background

movement is eliminated or the moving information from which the background movement is not eliminated may be recorded. As shown in Fig. 10A, if a plurality of objects exist in one frame, a unique ID number is assigned to the feature data of each object. The feature data of each object (ID : 1, 2, 3) is linked by list structure. By using the list structure, addition and deletion of the feature data of object are easily executed. As for the feature data of background 704, as shown in Fig. 10C, the affine transformation coefficient, an average and a direction of moving vector, a camera-work, and a color histogram are included. The camera-work is a kind of operation of the camera such as movement, pan, and zoom.

Next, Fig. 11 is a flow chart of decision processing of similarity decision at step 108 in Fig. 1. In the decision processing of similarity degree, the feature data 800 of each object in the original video data is compared with the feature data 804 inputted from outside in order. The feature data 804 may be directly inputted as numerical values or as feature data extracted from video. If the object includes plural kinds of feature data, the similarity degree for each feature data is calculated (step 803). As for the comparison between the feature data 800 in original video data and the feature data 804 inputted from outside, a suitable method is used based on kind of the feature data. For example, in case the feature data is

the color histogram, a difference of each element in histogram is used. In case two objects to be compared include different kinds of the feature data, only one kind of the feature data commonly included in the two objects is compared. When retrieval of all feature data of all objects is completed at steps 801 and 802, the retrieval result of the object is displayed (step 805) and this processing is completed.

In case of comparison processing of the moving of two objects, the background movement is eliminated using the feature data of the background. Fig. 12 is a schematic diagram showing elimination of the background movement from the video to be compared. As shown in Fig. 12, original video data 901 is taken by a moving camera to pursue the object moving to the left. However, in a frame of the video data 901, the object stands still and the background moves to the right. In order to retrieve the object moving to the left from the video data 901, if the object data 905 moving to the left is input from outside, the feature data of the object in the video data 901 is not matched with the input object data 905 because the object in the video data 901 stands still. However, in the present invention, the feature data of object and the feature data of background are previously recorded as a descriptor. Accordingly, by using the moving of the background, the moving background

904 by the camera-work is eliminated from the video data 901 by separation processing 902. As a result, the object data 903 moving to the left in the video data is detected. In short, a difference between the feature data of the object and the feature data of the background is calculated as separation processing 902 in order to detect the object 903 only. By comparing the detected object 903 with the input object 905, the object matched with the input object 905 is retrieved from the original video data 901, or a frame including the object matched with the input object 905 is retrieved from the original video data 901. In this case, if the difference data is previously recorded in the descriptor as mentioned-above, the separation processing 902 is not necessary.

Fig. 13 is a schematic diagram showing retrieval of the frame using the camera-work matched with an input camera-work according to the present invention. As shown in Fig. 13, the feature data of object 1003 is eliminated from the feature data of original video data 1001 by separation processing 1002 in order to detect the background 1004 moved by the camera work. The detected background data 1004 is compared with the input background data 1005 moved by the camera-work. As a result, a frame matched with the camera-work of the input background data 1005 is retrieved from the original video data 1001. In other words, the retrieved frame is decided to be taken by

the camera-work of the input background data 1005 when the original video data 1001 is inputted by the camera. In the same way as in Fig. 12, if the difference data is previously recorded in the descriptor, the separation processing 1002 is not necessary.

Fig. 14 is a flow chart of processing of the video retrieval system according to a second embodiment of the present invention. In the second embodiment, instead of detection of the object from the video data in the first embodiment, the original video data 1100 with the feature data analyzed previously is inputted (step 1100). The feature data of the object is extracted from the input feature data (step 1102). In the same way as in the first embodiment, similarity degree between the feature data of the original video data 1100 extracted at step 1102 and the feature data 1110 of the retrieval object inputted at step 1109 is calculated as decision processing (step 1108). The retrieval result is synthetically displayed as the object retrieval result data 1112 (step 1111).

Fig. 15 is a flow chart of processing of the video retrieval system according to a third embodiment of the present invention. In the third embodiment, moving data of retrieval object inputted from outside is compared with feature data in a plurality of descriptors. In order to

retrieve the object moving in time series, correspondence processing of same object is executed for objects included in the plurality of descriptors 1201 (step 1202). On the other hand, as for the moving data 1203 of retrieval object inputted from outside, sampling processing to extract the moving data at an interval equal to frame interval corresponding to the descriptor 1201 is executed (step 1204). Then, each of the sampled moving data inputted from outside is compared with feature data of object of corresponding descriptor (step 1205). The frame including the object matched with the sampled moving data is displayed as the retrieval result (step 1206).

Fig. 16 is a schematic diagram showing correspondence of same object between two successive frames. The correspondence processing of the object of two successive frames represented in descriptors 1201 at step 1202 in Fig. 15 is explained. As shown in Fig. 16, by using the feature data (position and moving information) of the object 1301 in one frame represented by N-th descriptor, a predicted position 1302 of the object 1301 in other frame represented by (N+1)-th descriptor is calculated. Then, actual object 1303 nearest to the predicted position 1302 is detected from the other frame represented by (N+1)-th descriptor. This actual object 1303 is decided to correspond to the object 1301.

Fig. 17 is a schematic diagram of sampling processing

of the moving data input from outside. The sampling processing of the moving data 1203 inputted from outside at step 1204 in Fig. 15 is explained. In Fig. 17, the moving data 1401 inputted from outside is continuous moving data such as drawing curved line. This moving data 1401 itself is not compared with the feature data (position and moving information) of the object represented by a plurality of descriptions. Each descriptor is dispersed data added to one frame at each predetermined number of frames (frame interval) in the video stream. Therefore, the moving data 1401 is sampled by the frame interval between two successive descriptors as shown in Fig. 17. Then, each of the sampled moving data 1402 is compared with the feature data of object in corresponding descriptor.

A memory can be used to store instructions for performing the process described above. The process may be performed with the aid of a general purpose computer or microprocessor. Such a memory can thus be a CD-ROM, floppy disk, hard disk, magnetic tape, semiconductor memory, and so on.

Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein. It is intended that the specification and examples

be considered as exemplary only, with the true scope and spirit of the invention being indicated by the following claims.

WHAT IS CLAIMED IS:

1. A method for detecting an object in video data, the video data including a background area and at least one object area, the video data comprising frames divided into blocks, the method comprising the steps of:

extracting a moving vector from each block of a frame;

estimating a movement of the background area in the video data by referring to the moving vectors;

eliminating the estimated movement of the background area from the video data; and

detecting the object area by referring to the moving vectors in the video data from which the movement of the background area is eliminated.

2. The object detection method according to claim 1, further comprising the step of:

eliminating a low reliability moving vector from the video data after extracting the moving vector of each block.

3. The object detection method according to claim 1, wherein the estimating step includes the steps of:

approximating the movement of the background area by a predetermined transformation model; and

estimating a transformation coefficient of the

transformation model by referring to the moving vectors in the video data.

4. The object detection method according to claim 3, wherein the transformation coefficient of the conversion matrix is estimated by a robust estimation method.

5. The object detection method according to claim 1, wherein the estimating step includes the steps of:
unifying blocks having similar moving vectors, the frame being thus divided into a plurality of unified areas;
estimating the transformation coefficient of each unified area;
clustering the unified areas each having similar transformation coefficient; and
assigning the largest clustered area as the background area.

6. The object detection method according to claim 1, wherein the estimating step includes the steps of:
unifying blocks having similar moving vectors in a frame;
comparing a plurality of frames each being divided into a plurality of unified areas;
estimating the transformation coefficient of each

unified area in the plurality of frames;

clustering the unified areas each having similar transformation coefficient for each frame;

determining the correspondence of unified areas among the plurality of frames;

correcting the clustering result so that each of corresponding unified areas belongs to the same cluster among the plurality of frames; and

assigning the largest clustered area as the background area in the plurality of frames.

7. An apparatus for detecting an object in video data, the video data including a background area and at least one object area, the video data comprising frames divided into blocks, comprising:

extraction means for extracting a moving vector from each block of a frame;

estimation means for estimating movement of the background area in the video data by referring to the moving vectors;

elimination means for eliminating the estimated movement of the background area from the video data; and

object detection means for detecting the object area by referring to the moving vectors in the video data from which the movement of the background area is eliminated.

8. A computer readable memory containing computer readable instructions for detecting an object in video data, the video data including a background area and at least one object area, the video data comprising frames divided into blocks, comprising:

instruction means for causing a computer to extract a moving vector from each block of a frame;

instruction means for causing a computer to estimate a movement of the background area in the video data by referring to the moving vectors;

instruction means for causing a computer to eliminate the estimated movement of the background area from the video data; and

instruction means for causing a computer to detect the object area by referring to the moving vectors in the video data from which the movement of the background area is eliminated.

9. A video data description method, comprising the steps of:

extracting feature data of a predetermined object and feature data of a background area from a frame of an input video;

describing the feature data of the predetermined object and the feature data of the background area as a descriptor of the frame; and

attaching the descriptor to the frame.

10. The video data description method according to claim 9,

wherein the describing step includes the step of:

describing a difference between the feature data of the predetermined object and the feature data of the background area as the descriptor.

11. The video data description method according to claim 9,

wherein the feature data of the predetermined object includes at least position, outward form, and moving information of the object, and

wherein the feature data of the background area includes at least moving information of the background area.

12. The video data description method according to claim 9,

wherein the descriptor includes a frame number, a pointer to a next descriptor, the feature data of the background area, and the feature data of each object in the frame.

13. The video data description method according to

claim 12,

wherein the descriptor is created from a corresponding frame at an interval of a predetermined number of frames in the video stream.

14. A computer readable memory containing computer readable instructions, comprising:

instruction means for causing a computer to extract feature data of a predetermined object and feature data of a background area from a frame of an input video;

instruction means for causing a computer to describe the feature data of the predetermined object and the feature data of the background area as a descriptor of the frame; and

instruction means for causing a computer to attach the descriptor to the frame.

15. A video data retrieval method, comprising the steps of:

describing feature data of a predetermined object and feature data of a background area for each frame in a plurality of frames;

inputting feature data of a retrieval object;

calculating a difference between the feature data of the background area and the feature data of the predetermined object for each frame;

comparing the difference with the feature data of the retrieval object; and

retrieving the predetermined object or the frame including the predetermined object matched with the retrieval object from the plurality of frames according to the comparison result.

16. The video data retrieval method according to claim 15,

wherein the describing step includes the step of:

describing the difference between the feature data of the background area and the feature data of the predetermined object.

17. The video data retrieval method according to claim 15,

further comprising steps of:

inputting feature data of the background area representing camera work;

comparing the input feature data with the feature data of the background area of each frame; and

retrieving the frame obtained by a camera work matched with the camera work of the input feature data from the plurality of frames according to the comparison result.

18. The video data retrieval method according to

claim 15,

wherein the feature data of the predetermined object includes moving information of the predetermined object for each frame, and

further comprising the steps of:

inputting a moving information of the retrieval object;

sampling the moving information of the retrieval object at the frame interval;

comparing the sampled moving information with the moving information of the predetermined object of each frame; and

retrieving the predetermined object or the frame including the predetermined object matched with the retrieval object from the plurality of frames according to the comparison result.

19. A video data retrieval apparatus, comprising:
memory means for storing a descriptor of feature data of a predetermined object and feature data of a background area for each frame in a plurality of frames;

input means for inputting feature data of a retrieval object;

calculation means for calculating a difference between the feature data of the background area and the feature data of the predetermined object; and

retrieval means for retrieving the predetermined object or the frame including the predetermined object matched with the retrieval object from the plurality of frames by comparing the difference with the feature data of the retrieval object.

20. A computer readable memory containing computer readable instructions, comprising:

instruction means for causing a computer to describe feature data of a predetermined object and feature data of a background area for each frame in a plurality of frames;

instruction means for causing a computer to input feature data of a retrieval object;

instruction means for causing a computer to calculate a difference between the feature data of the background area and the feature data of the predetermined object;

instruction means for causing a computer to compare the difference with the feature data of the retrieval object; and

instruction means for causing a computer to retrieve the predetermined object or the frame including the predetermined object matched with the retrieval object from the plurality of frames according to the comparison result.

ABSTRACT OF THE DISCLOSURE

A video data description method. Both feature data of predetermined object and feature data of background area are extracted from a frame of input video. The feature data of predetermined object and the feature data of background area are described as a descriptor of the frame.

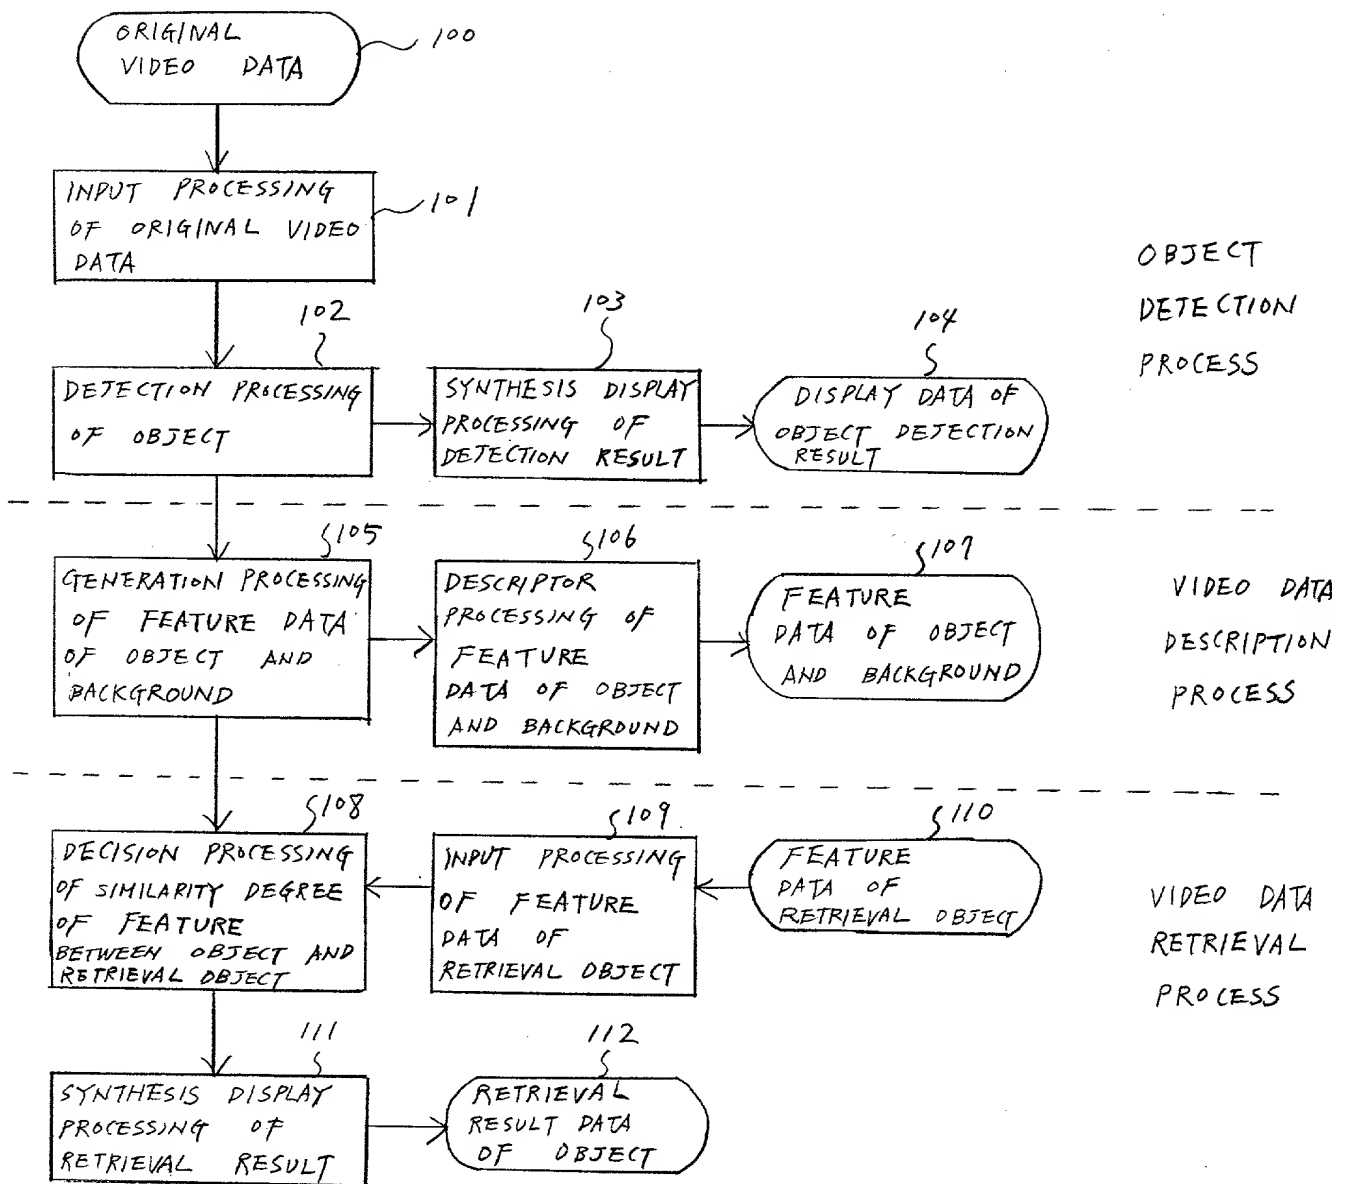


FIG. 1

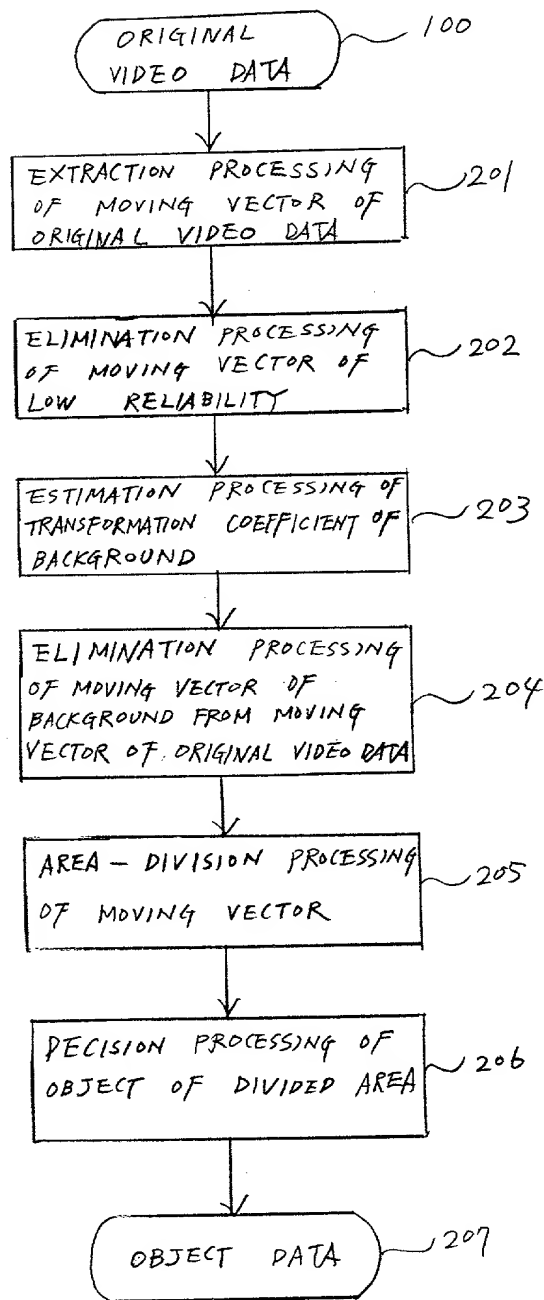


FIG. 2

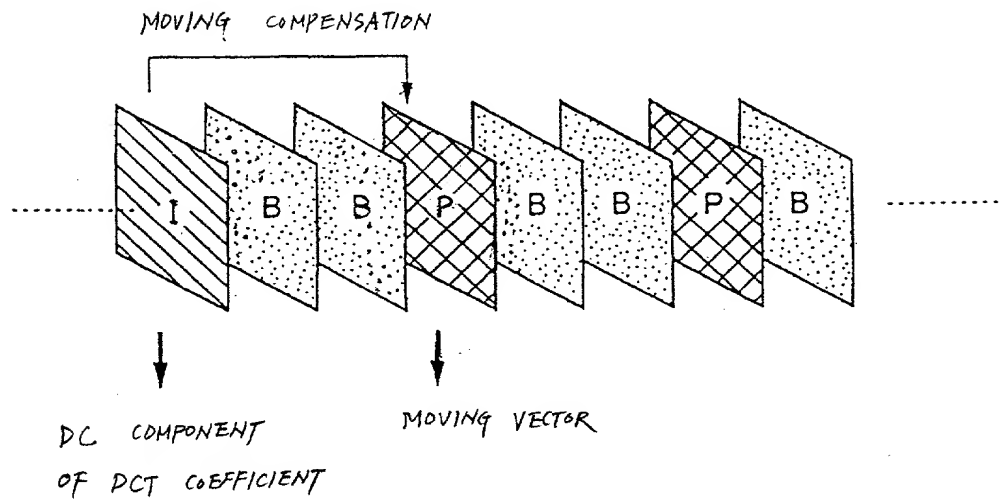


FIG. 3

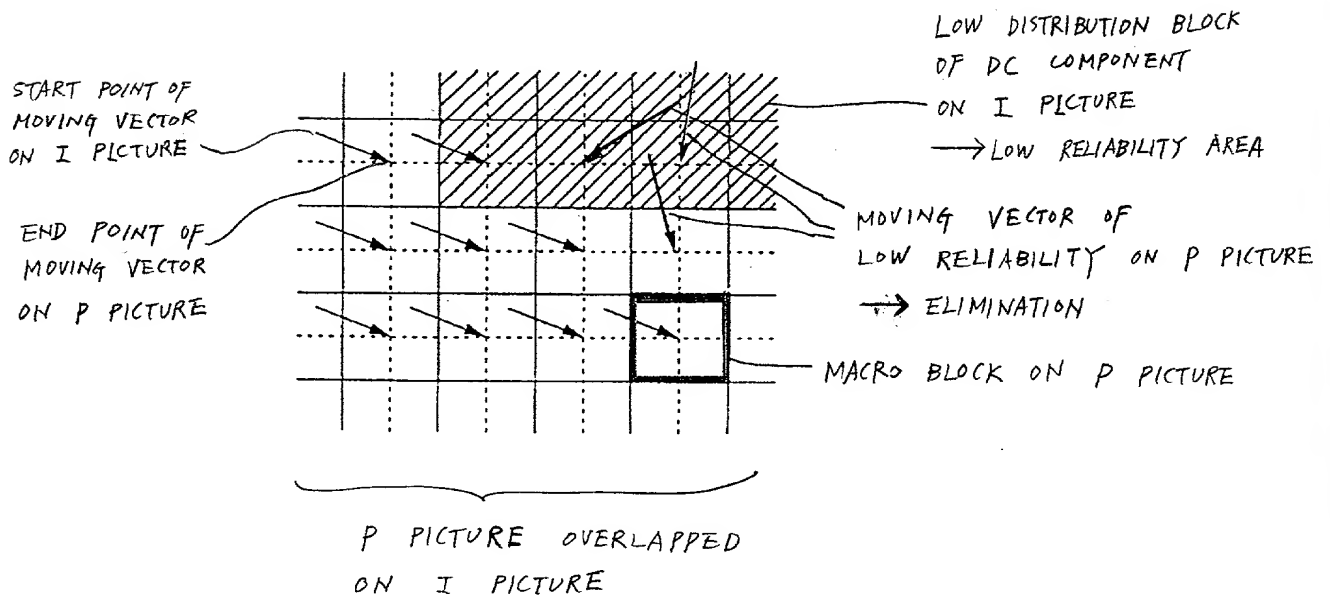


FIG. 4

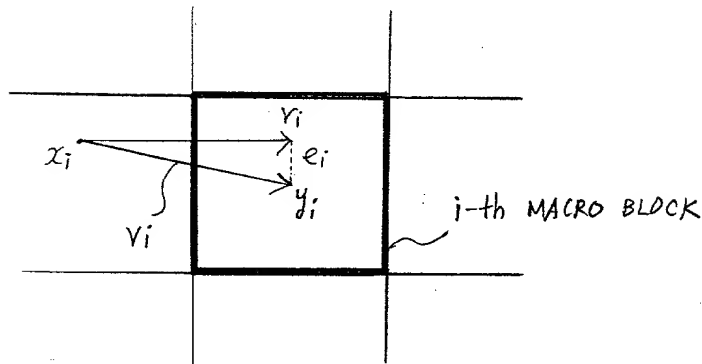


FIG. 5

OBJECT 2 (UNIFIED BLOCKS)

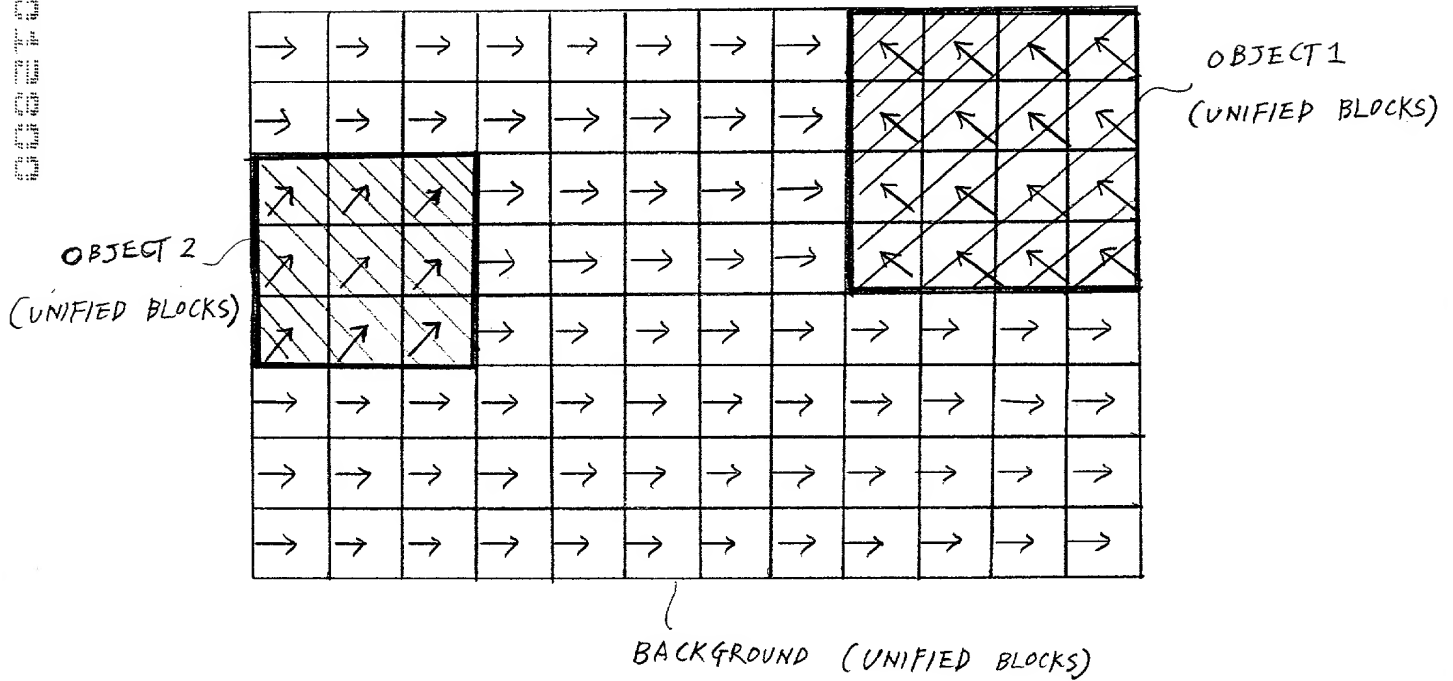


FIG. 7

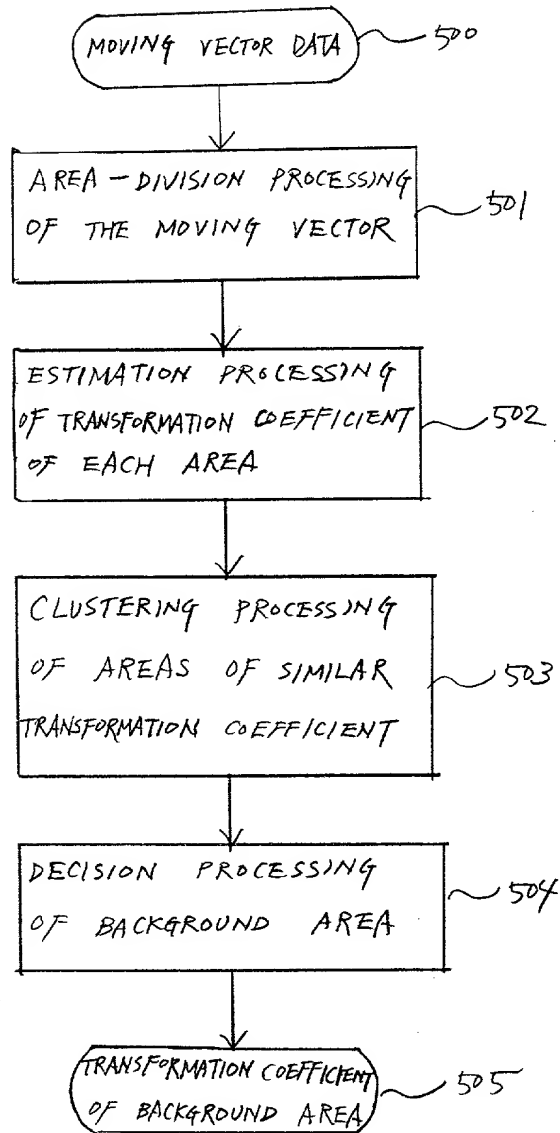


FIG. 6

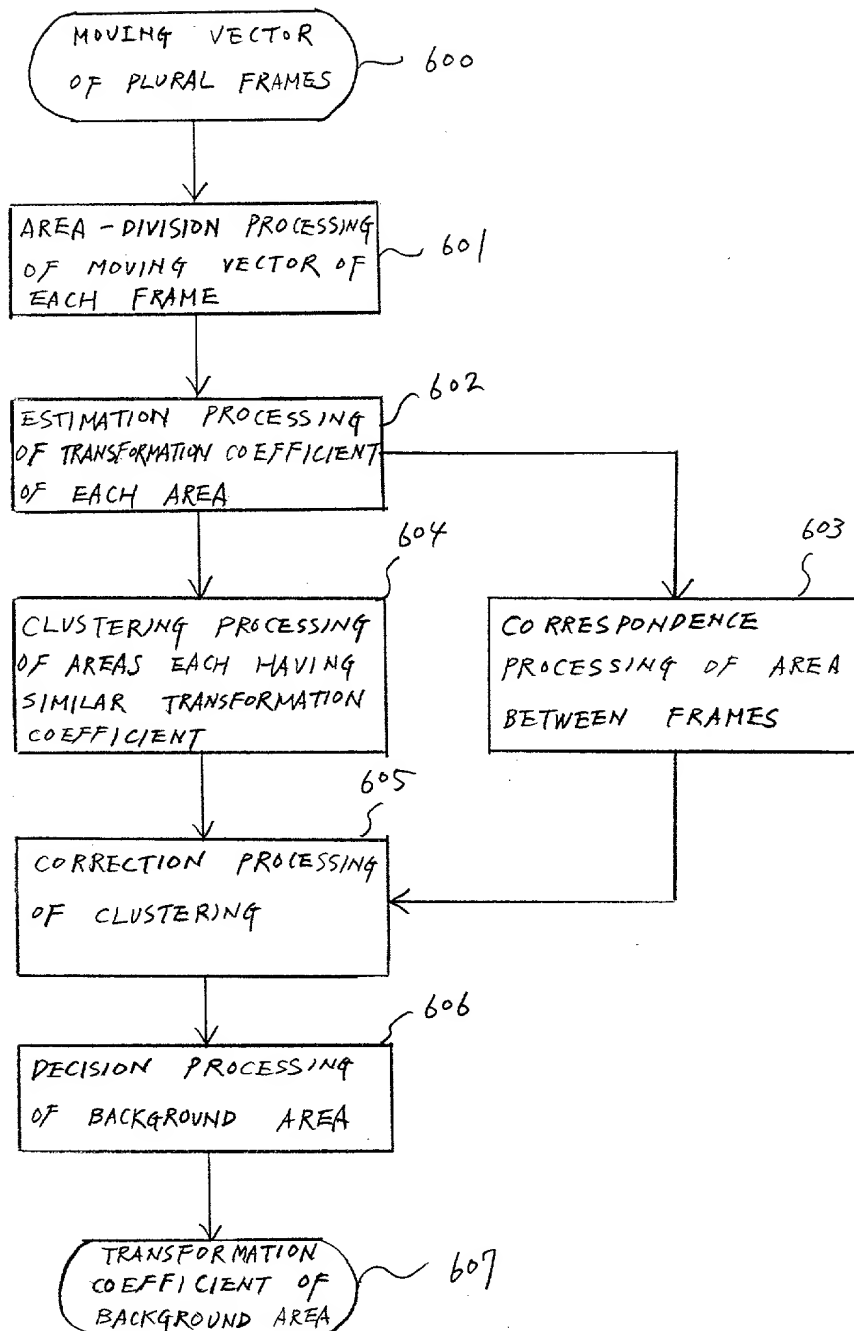


FIG. 8

FIG. 9A

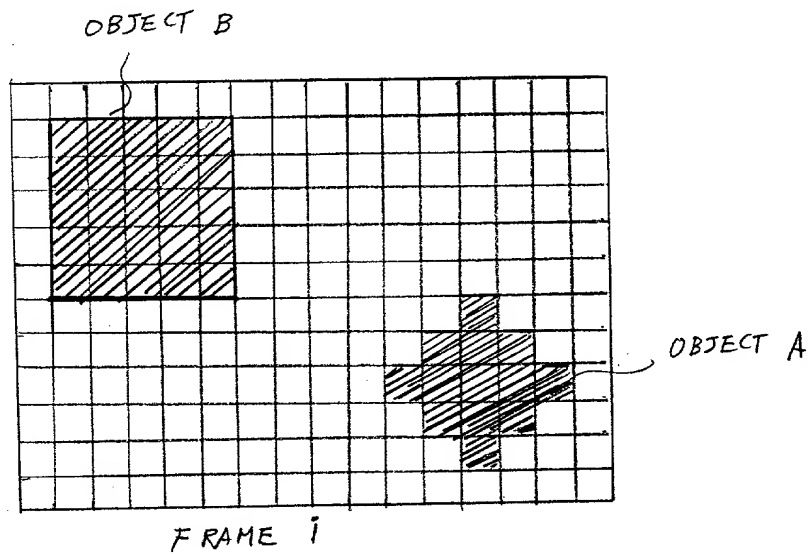


FIG. 9B

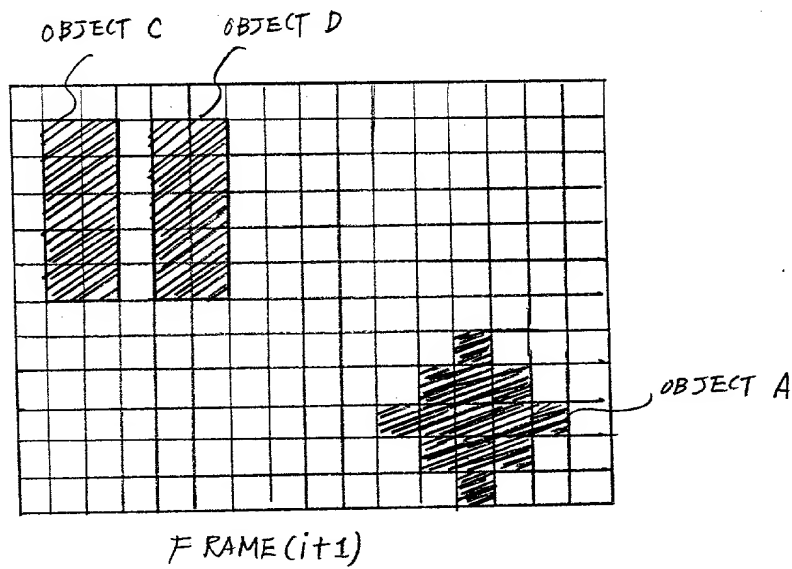
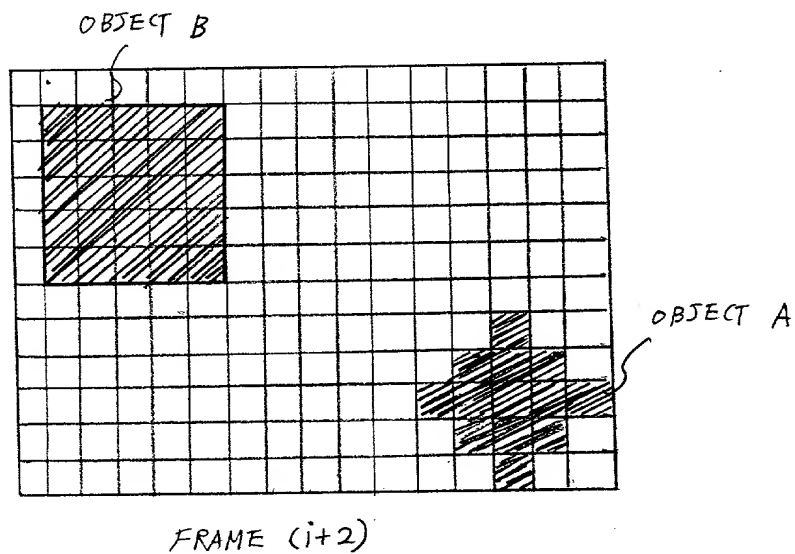


FIG. 9C



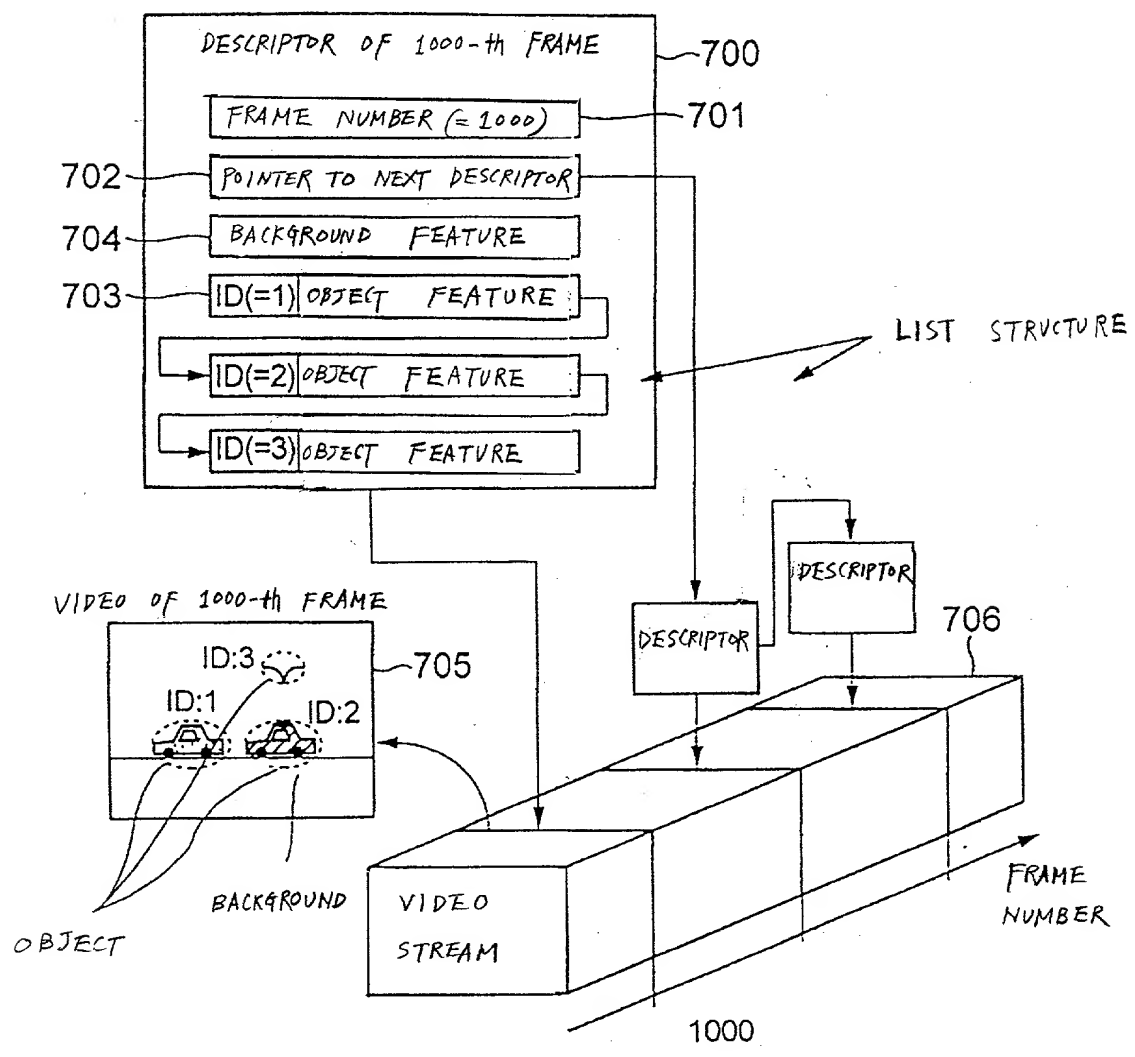


FIG. 10A

- OBJECT FEATURE
- POSITION
 - OUTWARD FORM
 - AFFINE TRANSFORMATION COEFFICIENT
 - AVERAGE, DIRECTION OF MOVING VECTOR
 - COLOR HISTOGRAM

FIG. 10B

- BACKGROUND FEATURE
- AFFINE TRANSFORMATION COEFFICIENT
 - AVERAGE, DIRECTION OF MOVING VECTOR
 - CAMERA-WORK
 - COLOR HISTOGRAM

FIG. 10C

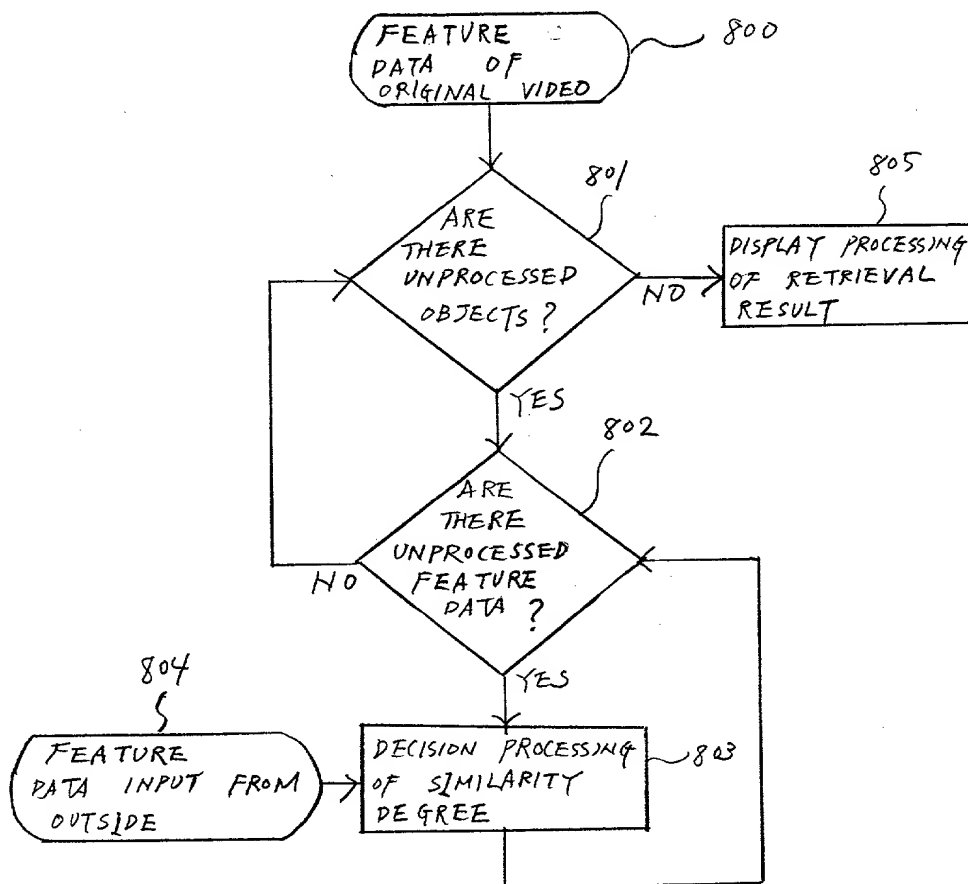


FIG. 11

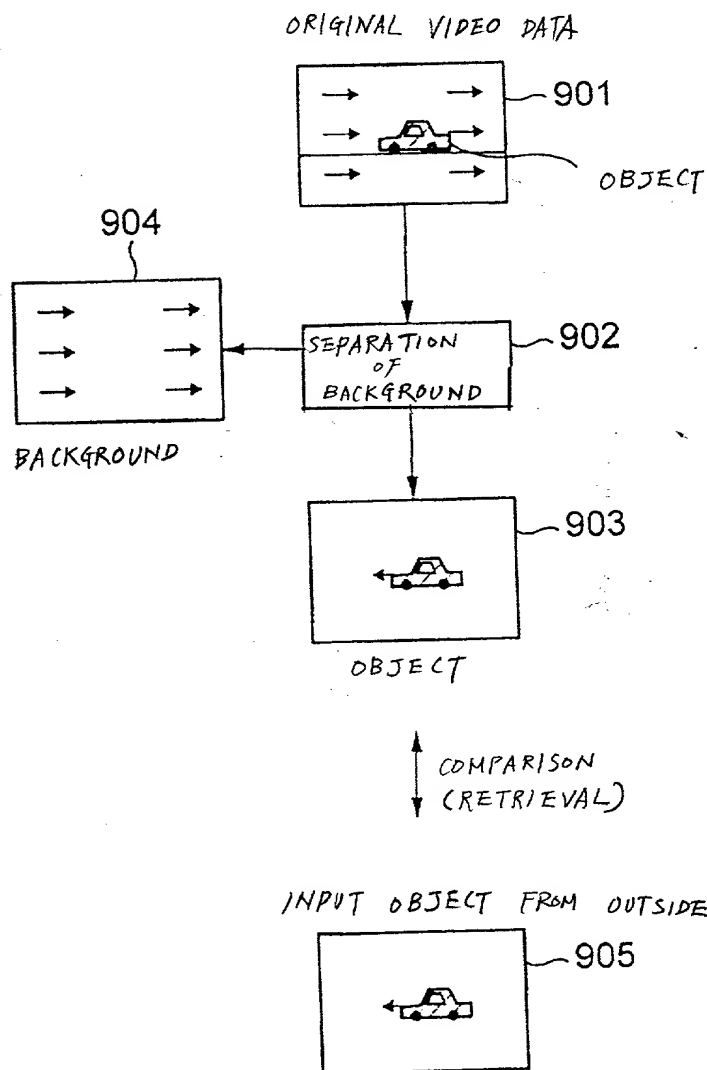


FIG. 12

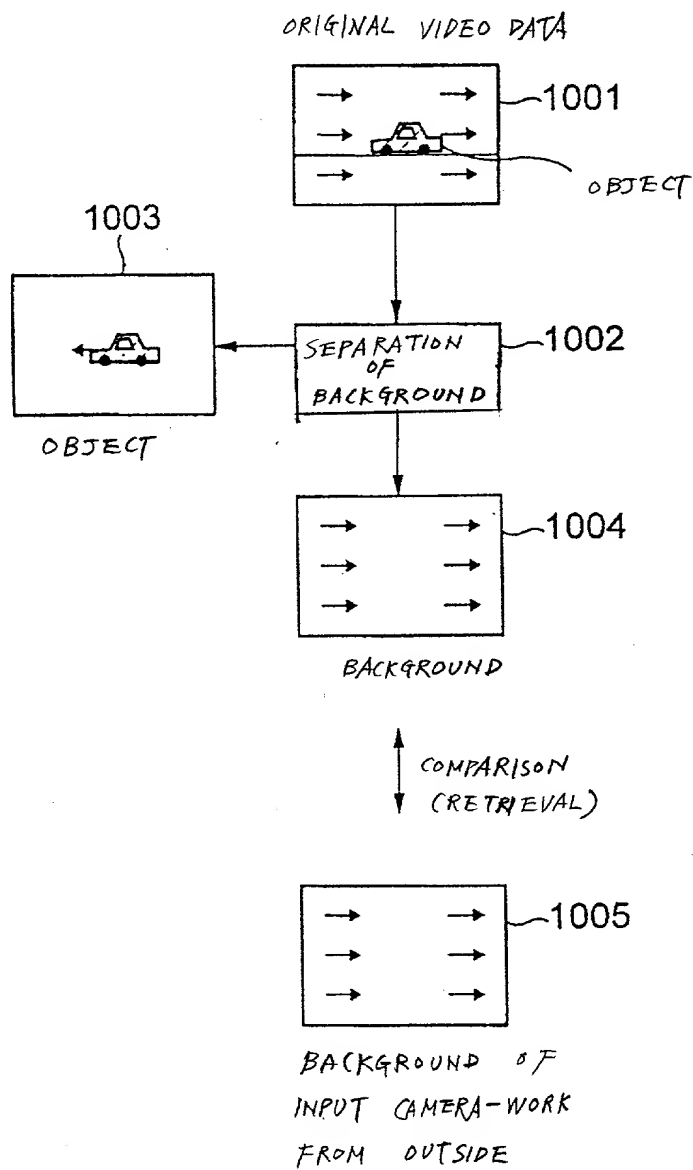


FIG. 13

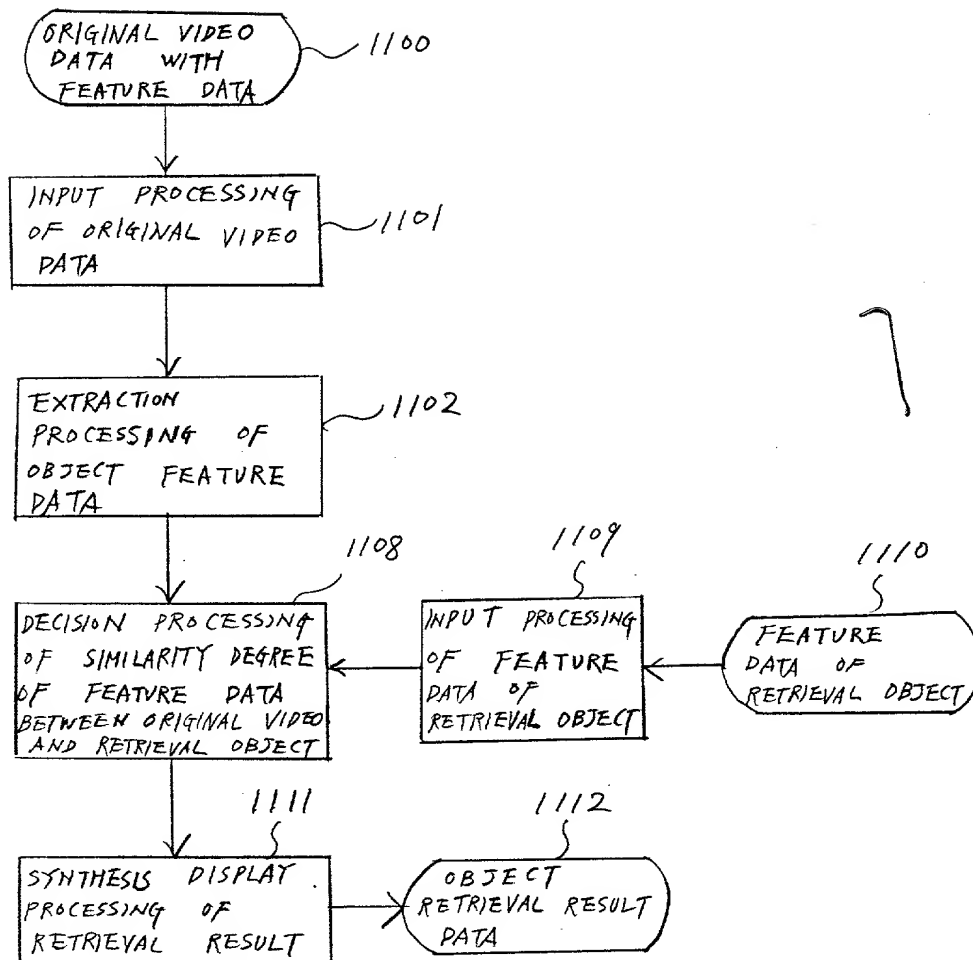


FIG. 14

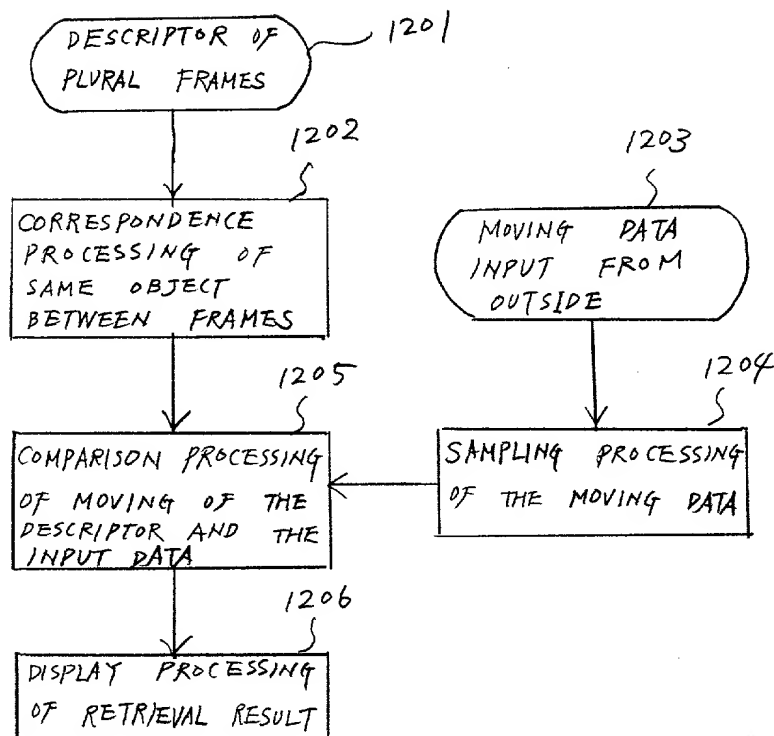


FIG. 15

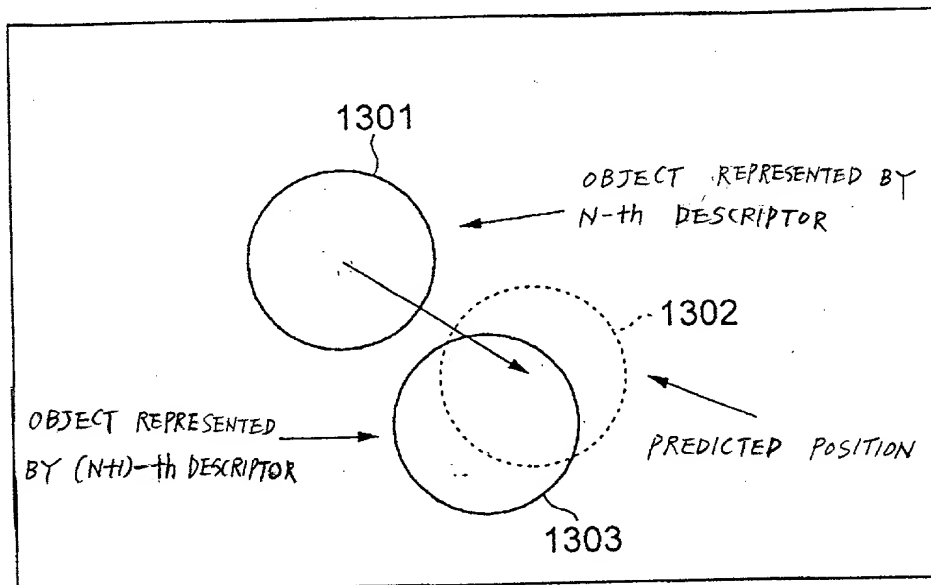


FIG. 16

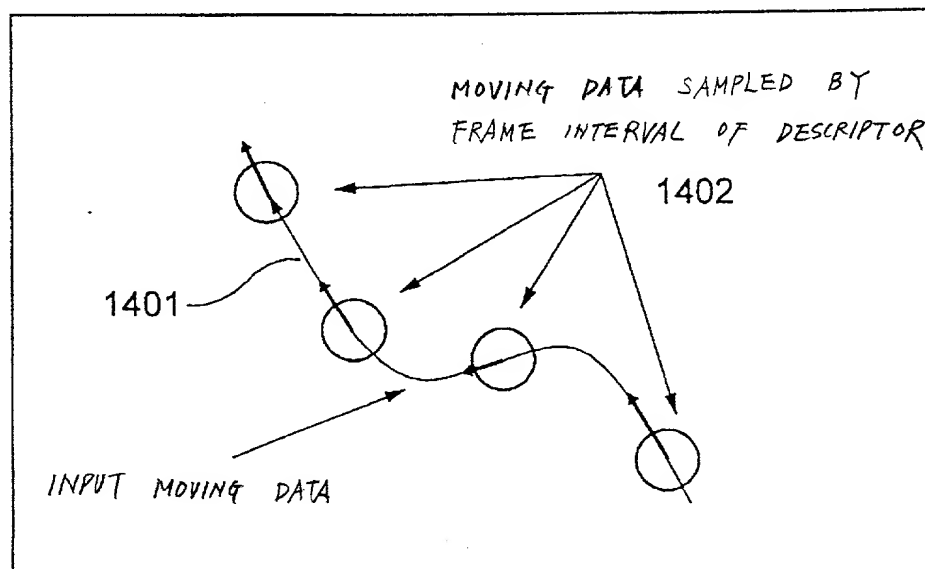


FIG. 17

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者（下記の名称が複数の場合）であると信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

AN OBJECT DETECTION METHOD AND

A VIDEO DATA RETRIEVAL METHOD

上記発明の明細書は、

- ☐ 本書に添付されています。
- ☐ ____月____日に提出され、米国出願番号または特許協定条約国際出願番号を____とし、
(該当する場合) ____に訂正されました。

the specification of which

- ☒ is attached hereto.
- ☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration
(日本語宣言書)

私は、米国法典第35編119条 (a) - (d) 項又は365条 (b) 項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)
外国での先行出願

<u>P11-022372</u> (Number) (番号)	<u>Japan</u> (Country) (国名)
 (Number) (番号)	 (Country) (国名)

私は、第35編米国法典119条 (e) 項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

<u>(Application No.)</u> (出願番号)	<u>(Filing Date)</u> (出願日)
------------------------------------	-------------------------------

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条 (c) に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

<u>(Application No.)</u> (出願番号)	<u>(Filing Date)</u> (出願日)
------------------------------------	-------------------------------

<u>(Application No.)</u> (出願番号)	<u>(Filing Date)</u> (出願日)
------------------------------------	-------------------------------

私は、私自信の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

<u>29/January/1999</u> (Day/Month/Year Filed) (出願年月日)	Priority Claimed 優先権主張
 (Day/Month/Year Filed) (出願年月日)	<input checked="" type="checkbox"/> Yes はい
	<input type="checkbox"/> No いいえ

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

<u>(Application No.)</u> (出願番号)	<u>(Filing Date)</u> (出願日)
------------------------------------	-------------------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

<u>(Status: Patented, Pending, Abandoned)</u> (現況：特許許可済、係属中、放棄済)

<u>(Status: Patented, Pending, Abandoned)</u> (現況：特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration
(日本語宣言書)

委任状：私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。
(弁護士、または代理人の指名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

Norman F. Oblon, Reg. No. 24,618; Marvin J. Spivak, Reg. No. 24,913; C. Irvin McClelland, Reg. No. 21,124; Gregory J. Maier, Reg. No. 25,599; Arthur I. Neustadt, Reg. No. 24,854; Richard D. Kelly, Reg. No. 27,757; James D. Hamilton, Reg. No. 28,421; Eckhard H. Kuesters, Reg. No. 28,870; Robert T. Pous, Reg. No. 29,099; Charles L. Gholz, Reg. No. 26,395; William E. Beaumont, Reg. No. 30,996; Robert F. Gnuse, Reg. No. 27,295; Jean-Paul Lavalleye, Reg. No. 31,451; Stephen G. Baxter, Reg. No. 32,884; Robert W. Hahl, Reg. No. 33,893; Richard L. Treanor, Reg. No. 36,379; Steven P. Weihrouch, Reg. No. 32,829; John T. Goolkasian, Reg. No. 26,142; Richard L. Chinn, Reg. No. 34,305; Steven E. Lipman, Reg. No. 30,011; Carl E. Schlier, Reg. No. 34,426; James J. Kulbaski, Reg. No. 34,648; Richard A. Neifeld, Reg. No. 35,299; J. Derek Mason, Reg. No. 35,270; Surinder Sachar, Reg. No. 34,423; Christina M. Gadiano, Reg. No. 37,628; Jeffrey B. McIntyre, Reg. No. 36,867; Paul E. Rauch, Reg. No. 38,591; William T. Enos, Reg. No. 33,128 and Michael E. McCabe, Jr., Reg. No. 37,182, with full powers of substitution and revocation.

書類送付先

Send Correspondence to:

OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C.
FOURTH FLOOR
1755 JEFFERSON DAVIS HIGHWAY
ARLINGTON, VIRGINIA 22202 U.S.A.

直接電話連絡先：(名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)
(703) 413-3000

単独発明者または第一の共同発明者の氏名	Full name of sole or first joint inventor Koji YAMAMOTO	
発明者の署名	Inventor's signature <i>Koji Yamamoto</i>	Date December 16, 1999
住所	Residence Kanagawa-ken, Japan	
国籍	Citizenship Japan	
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan	
第二の共同発明者の氏名	Full name of second joint inventor, if any Osamu HORI	
第二の共同発明者の署名	Second joint Inventor's signature <i>Osamu Hori</i>	Date December 16, 1999
住所	Residence Kanagawa-ken, Japan	
国籍	Citizenship Japan	
郵便の宛先	Post Office Address Same as above	

(第三以降の共同発明者についても同様に記載し、署名すること)

(Supply similar information and signature for third and subsequent joint inventors.)

Japanese Language Declaration
(日本語宣言書)

第三の共同発明者の氏名	Full name of third joint inventor, if any Toshimitsu KANEKO
第三の共同発明者の署名	Third joint Inventor's signature <i>Toshimitsu KANEKO</i>
住所	Residence Kanagawa-ken, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o Intellectual Property Division, Toshiba Corporation, 1-1-1, Shibaura, Minato-ku, Tokyo, Japan

第四の共同発明者の氏名	Full name of fourth joint inventor, if any Takeshi MITA
第四の共同発明者の署名	Fourth joint Inventor's signature <i>Takeshi Mita</i>
住所	Residence Kanagawa-ken, Japan
国籍	Citizenship Japan
郵便の宛先	Post Office Address Same as above

第五の共同発明者の氏名	Full name of fifth joint inventor, if any
第五の共同発明者の署名	Fifth joint Inventor's signature
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

第六の共同発明者の氏名	Full name of sixth joint inventor, if any
第六の共同発明者の署名	Sixth joint Inventor's signature
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)